

EC22-R10M


FEATURES

- (1) Axial lead type, small lightweight design.
- (2) Special magnetic core structure contributes to high-Q and self-resonant frequencies.
- (3) Treated with epoxy resin coating for humidity resistance to ensure longer life.
- (4) Heat-resistant adhesives and special structural design for effective open-circuit measurement.


APPLICATIONS

- (1) Televisions, personal computer, radios, telephones and other various electronic products.

SHAPES & DIMENSIONS

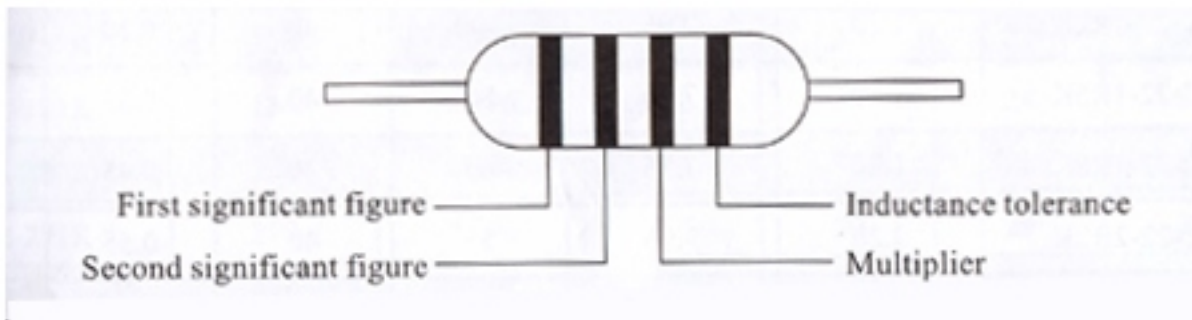

EC-24-TR-A-100 K

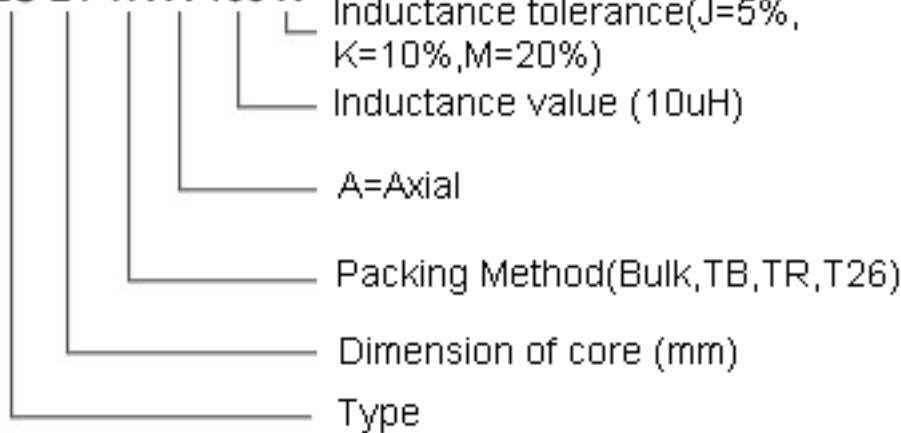

Unit in mm

Color Code	Significant	figure	Multiplier Inductance tolerance(%)
Black	0	1	-
Brown	1	10	-
Red	2	100	-
Orange	3	1000	-
Yellow	4	-	-
Green	5	-	-
Blue	6	-	-
Violet	7	-	-
Gray	8	-	-
White	9	-	-
Black	-	-	±20
Silver	-	0.01	±10
Gold	-	0.10	±5

PART NO.	INDUC_ TANCE (μH)	TEST FREQ (MHz)	SRF (min) (MHz)	Q MIN	DCR (MAX) (Ω)	IDC(mA) (MAX)
EC22-R10M	0.10	25.2	250	50	0.030	700